


66 BLOCK PROTECTION

UP3B - 66 BLOCK, UL PRIMARY / SECONDARY SURGE PROTECTORS

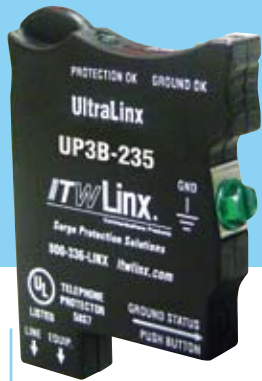

Features:

- **Dual Indicator Lights** - Protection OK and Ground Connection OK.
- **Solid-state Protection** - Provides the fastest response.
- **Single Pair Protection** - Scale the protection to the system size. Protect only the lines requiring protection.
- **Streamlined Installation** - Eliminate redundant cross-connects by adding protection directly at the 66 Block. Press fit protectors to the block and attach the ground bar to the protectors. A Screw Ground Lug also is required. (MGBSGL-1)
- **Sneak Current Protection** - Protects against fires caused by overloads and power crosses.
- **Cost Savings** - Eliminate expensive five-pin blocks and use economical 66 Blocks.
- **Optimum Protection** - Available in a number of voltage ratings to match system operating voltages.
- **Ideal for Retrofit Applications** - Just remove the bridging clips from the block & replace them with the UltraLinx Protector, add the ground connection and the pair is protected!
- **Lifetime Product Warranty**

ORDERING INFORMATION

ITW Linx Part Number	Description
UP3B-7.5	UL Primary and Secondary listed with 350mA fuse for voice/fax/modem lines (clamping 7.5V)
UP3B-16	UL Primary and Secondary listed with 350mA fuse for voice/fax/modem lines (clamping 16V)
UP3B-27	UL Primary and Secondary listed with 350mA fuse for voice/fax/modem lines (clamping 27V)
UP3B-39	UL Primary and Secondary listed with 350mA fuse for voice/fax/modem lines (clamping 39V)
UP3B-75	UL Primary and Secondary listed with 350mA fuse for voice/fax/modem lines (clamping 75V)
UP3B-100	UL Primary and Secondary listed with 350mA fuse for voice/fax/modem lines (clamping 100V)
UP3B-235	UL Primary and Secondary listed with 350mA fuse for voice/fax/modem lines (clamping 235V)

* Above products have to be purchased of minimum 25, multiple 5 after.

* Questions about ordering? Please contact us at 1-800-336-LINX / Contact an authorized distributor for pricing *



For up-to-date warranty information, please visit our web site at www.itwlinx.com.

TECHNICAL SPECIFICATIONS

PRODUCT SPECIFICATIONS:

Agency Approval	UL 497 (Primary), 497A (Secondary)
LED Indicators	Yes
Sneak Current Protection	Yes
Grounding Requirements	Field installed solid copper wire
..... for Primary 1-6 pairs	10 AWG
..... for Primary 7-25 pairs	6 AWG
..... for Secondary 1-6 pairs	14 AWG
..... for Secondary 7-25 pairs	6 AWG
Recommended Grounding Impedance.....	<0.5 Ohm
Fuse Rating	350mA
.....	1.6 Ohms
Applications.....	Data / Voice / Fax / Modem lines
Width / Height / Depth / Weight.....	1.88" / 2.62" / 0.38" / 0.04 lbs
Product Warranty	Lifetime
Connected Equipment Warranty	N/A

SIGNAL LINE SURGE PROTECTION:

TELCO CIRCUIT PROTECTION

Signal Perfect Circuitry	Yes
Auto-Resettable	N/A
Clamping Level.....	7.5V, 16V, 27V, 39V, 75V, 100V, 235V
Response Time	1-5 Nanoseconds
Capacitance.....	<50pF
Suppression Modes	Metallic & Longitudinal
Wires Protected	2-wires, 1-pair
Termination Type	66 type M Blocks

T1 / ISDN / LAN CIRCUIT PROTECTION

For more technical information, refer to "TECHNICAL REFERENCE", page(81-98).

Signal Perfect™ - For more information, refer to page 81.



UltraLinx™

